


Made Tough Since 1936

NORMALISED SLEDGE HAMMER

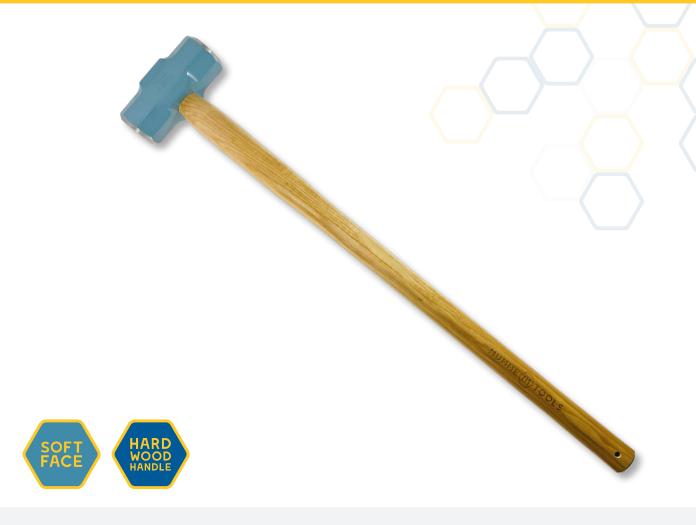

FEATURES

- A well balanced versatile sledge hammer for building, construction, mining and demolition work
- Head is normalised for a softer face (below 20HRC) that will mushroom, for applications where risk of chipping needs to be minimised
- Hammer heads are wedge pinned through the wooden Hickory handle for a uniquely shockresistant characteristic
- M Includes tether hole for working at heights

SPECIFICATIONS

PART NO.	DESCRIPTION	HEAD WEIGHT	HANDLE LENGTH
5HSNH04	Normalised Sledge Hammer	1.8kg (4lb)	600mm
5HSNH07	Normalised Sledge Hammer	3.18kg (7lb)	750mm
5HSNH10	Normalised Sledge Hammer	4.33kg (10lb)	900mm
5HSNH14	Normalised Sledge Hammer	6.36kg (14lb)	900mm